

PVH

DECOR • Since 1879

SPECIFICATION

Quality	: STRIKE
Product definition	: tufted loop pile
Gauge	: 1/10"
No. of tufts	: $\pm 162400/m^2$
Pile fibre	: 100% polypropylene
Pile weight	: $540 \text{ gr}/m^2 \pm 5\%$
Pile height	: $2.6 \text{ mm} \pm 5\%$
Primary backing	: PP/PES non-woven - Colback
Tile backing	: Polyflex with a non-woven fabric
Total thickness	: $6.0 \text{ mm} \pm 5\%$
Total weight	: $4000 \text{ gr}/m^2 \pm 7,5\%$
Tile size	: $50 \times 50 \text{ cm} (\pm 19.7'' \times 19.7'')$
Tiles per box	: 20

PERFORMANCE

Use classification	EN 1307	: contract Class 32
Castor chair	EN 985	: A, continuous use
Abrasion	EN 1963 part A	: pass
Vettermann test	ISO TR 10361/EN1471	: pass
Thermal isolation	ISO 8302	: $0,05 \text{ m}^2\text{K}/\text{W}$
Dimensional stability	EN 986	: pass

ELECTROSTATIC PROPERTIES


Walk on test	EN 1815	: 0.1 kV
Horizontal electrical resistance	ISO CD 10965	: $9 \times 10^{11} \Omega$
Vertical electrical resistance	ISO CD 10965	: $9 \times 10^{11} \Omega$
Static loading	ISO TR 6356	: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: $C_{fl} - s1$
Hot metal nut test	BS 4790	: Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: 7-8
Rubbing, dry	ISO 105 X12	: 5.0
Rubbing, wet	ISO 105 X12	: 4.5
Shampoo	BS 1006	: 4.5
Water	NEN 5199	: 5.0
Water stains	EN 1307 annex F	: 5.0

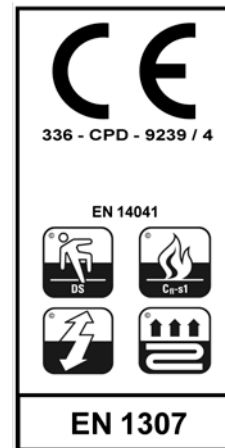

GENERAL

Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.
Pile direction:	Directional arrows are printed on the back of each tile.
	Best results are obtained when laid checkerboard.
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.